




303-001-21

- ◆ 符合JJG外径千分尺国家计量检定规程
- ◆ 套筒转动一圈, 测头进给2mm
- ◆ 防尘/防水等级: IP65
- ◆ 按键: 开/关, 初始值设置, 公/英制转换, 数据输出
- ◆ 带球测头
- ◆ 自动关机
- ◆ 硬质合金测量面, 棘轮套测力
- ◆ 配标准杆(除0-25mm/0-1"外)
- ◆ 带数据接口

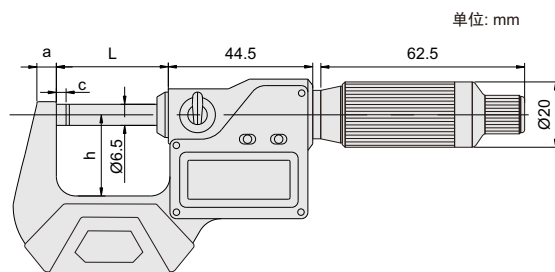


千分尺

标准杆(标配)




数据输出接口



球测头(标配)



测量壁厚

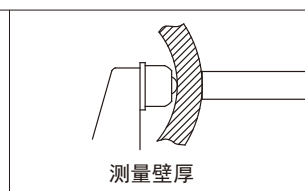

| 货号           | 量程               | 分辨率              | 精度   | a  | c   | h     | L     | 标准杆(标配) |
|--------------|------------------|------------------|------|----|-----|-------|-------|---------|
| 303-001-21 * | 0-25mm/0-1"      | 0.001mm/0.00005" | ±2μm | 6  | 3   | 25    | 34.5  | -       |
| 303-002-21 * | 25-50mm/1-2"     | 0.001mm/0.00005" | ±2μm | 8  | 3   | 32    | 59.5  | 25mm    |
| 303-003-21 * | 50-75mm/2-3"     | 0.001mm/0.00005" | ±3μm | 8  | 3   | 44.5  | 84.5  | 50mm    |
| 303-004-21 * | 75-100mm/3-4"    | 0.001mm/0.00005" | ±3μm | 8  | 3   | 57    | 109.5 | 75mm    |
| 303-005-21   | 100-125mm/4-5"   | 0.001mm/0.00005" | ±3μm | 10 | 3   | 70    | 135   | 100mm   |
| 303-006-21   | 125-150mm/5-6"   | 0.001mm/0.00005" | ±3μm | 10 | 3   | 82    | 160.5 | 125mm   |
| 303-007-21   | 150-175mm/6-7"   | 0.001mm/0.00005" | ±4μm | 12 | 5.5 | 94.5  | 186   | 150mm   |
| 303-008-21   | 175-200mm/7-8"   | 0.001mm/0.00005" | ±4μm | 12 | 5.5 | 107   | 211.5 | 175mm   |
| 303-009-21   | 200-225mm/8-9"   | 0.001mm/0.00005" | ±4μm | 23 | 5.5 | 129.5 | 236   | 200mm   |
| 303-010-21   | 225-250mm/9-10"  | 0.001mm/0.00005" | ±4μm | 23 | 5.5 | 142.5 | 261.5 | 225mm   |
| 303-011-21   | 250-275mm/10-11" | 0.001mm/0.00005" | ±5μm | 23 | 5.5 | 155   | 287   | 250mm   |
| 303-012-21   | 275-300mm/11-12" | 0.001mm/0.00005" | ±5μm | 23 | 5.5 | 167.5 | 312.5 | 275mm   |

\* 带生产厂检验证书