


- ◆ 符合JJF三针国家计量技术规范, 精度1级
- ◆ 与标准外径千分尺配合测量螺纹中径
- ◆ 卡簧可以使三针装置固定在千分尺上
- ◆ 直径精度: $\pm 0.5\mu\text{m}$
- ◆ 圆柱度: $1\mu\text{m}$
- ◆ 硬度: HRC60
- ◆ 适用范围: 螺纹外径 $\leq 50\text{mm}$

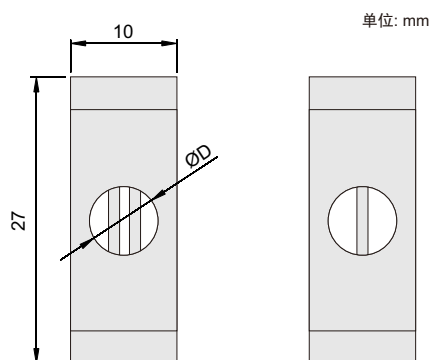

应用于测杆直径6.35mm(ØD)的千分尺

货号	量针直径	适用的螺距
530-0170-11	Ø0.170mm	0.2mm, 0.25mm, 0.3mm
530-0195-11	Ø0.195mm	0.35mm
530-0220-11	Ø0.220mm	0.4mm
530-0250-11	Ø0.250mm	0.45mm
530-0290-11	Ø0.290mm	0.5mm
530-0335-11	Ø0.335mm	0.6mm
530-0390-11	Ø0.390mm	0.7mm
530-0455-11	Ø0.455mm	0.75mm, 0.8mm
530-0530-11	Ø0.530mm	0.9mm
530-0620-11	Ø0.620mm	1.0mm
530-0725-11	Ø0.725mm	1.25mm
530-0895-11	Ø0.895mm	1.5mm
530-1100-11	Ø1.100mm	1.75mm, 2.0mm
530-1350-11	Ø1.350mm	2.5mm
530-1650-11	Ø1.650mm	3.0mm
530-2050-11	Ø2.050mm	3.5mm
530-2550-11	Ø2.550mm	4mm, 4.5mm
530-3200-11	Ø3.200mm	5mm, 5.5mm, 6mm
530-018-11	18对/套, 包含以上所有3针	

应用于测杆直径6.50mm(ØD)的千分尺

货号	量针直径	适用的螺距
530-0170-12	Ø0.170mm	0.2mm, 0.25mm, 0.3mm
530-0195-12	Ø0.195mm	0.35mm
530-0220-12	Ø0.220mm	0.4mm
530-0250-12	Ø0.250mm	0.45mm
530-0290-12	Ø0.290mm	0.5mm
530-0335-12	Ø0.335mm	0.6mm
530-0390-12	Ø0.390mm	0.7mm
530-0455-12	Ø0.455mm	0.75mm, 0.8mm
530-0530-12	Ø0.530mm	0.9mm
530-0620-12	Ø0.620mm	1.0mm
530-0725-12	Ø0.725mm	1.25mm
530-0895-12	Ø0.895mm	1.5mm
530-1100-12	Ø1.100mm	1.75mm, 2.0mm
530-1350-12	Ø1.350mm	2.5mm
530-1650-12	Ø1.650mm	3.0mm
530-2050-12	Ø2.050mm	3.5mm
530-2550-12	Ø2.550mm	4mm, 4.5mm
530-3200-12	Ø3.200mm	5mm, 5.5mm, 6mm
530-018-12	18对/套, 包含以上所有3针	

