


- ◆ 四面带凹槽
- ◆ 合金钢
- ◆ 平行度: 5 μ m/100mm
- ◆ 垂直度: 5 μ m/100mm
- ◆ 硬度: HRC58-60





653-085-51

货号	开口宽度(d)	钳口宽度(W)	L	H	M
653-020-51	0-20mm	25mm	65	29	9.3
653-040-51	0-40mm	38mm	100	48	23
653-065-51	0-65mm	50mm	135	50	25
653-085-51	0-85mm	63mm	170	63	32
653-100-51	0-100mm	73mm	185	70	35
653-100-52	0-100mm	80mm	195	80	40
653-125-51	0-125mm	88mm	230	80	40
653-125-52	0-125mm	100mm	240	90	45
653-160-51	0-160mm	125mm	280	100	50
653-175-51	0-175mm	150mm	300	100	50
653-208-51	0-208mm	200mm	350	110	55

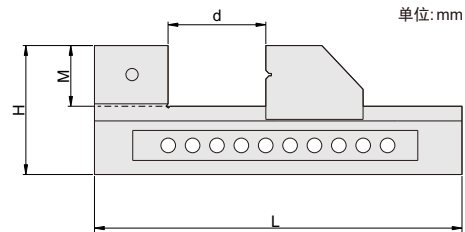

单位:mm

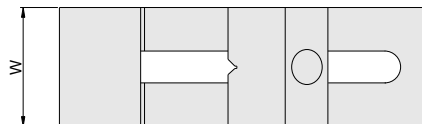

附件